

Technical Data Sheet

Item # Z-7515



AVAILABLE FINISHES:



Wall Mount Full-Back Adjustable

GLASS REQUIREMENTS:

- 3/8" (10mm) Tempered Glass
- 1/2" (12mm) Tempered Glass

SPECIFICATIONS:

- Solid brass body and clear polyurethane gaskets
- Screws and gaskets included
- Hinge swings 90° in and 90° out with self-centering
- Self-centering when within 15° of closed position
- Use thick gaskets for 3/8" glass or thin gaskets for 1/2" glass

CARES:


- Can be cleaned with water and a soft cloth
- Use of harsh or abrasive cleaners may harm finish and will void the warranty.
- Do not use power tools when installing or spray lubricant on this hinges
- 3 year warranty

FEATURES:

- Adjustment to accomodate the desired up to 90° after door is installed the allen screw.

Maximum Door Capacities	
2 HINGES	
Weight 80 lbs (36 Kg)	
Width 28" (711 mm)	

Glass Cut-Out Wall Deduction: 3/16" (5mm)

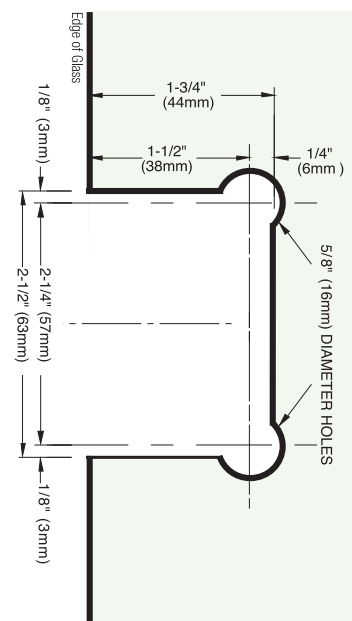

Rev Nov, 2023