

# Technical Data Sheet

## Item # Z-4425

### Glass-to-Glass 90° Rounded Clamp

#### GLASS REQUIREMENTS:


- 3/8" (10mm) Tempered Glass
- 1/2" (12mm) Tempered Glass

#### SPECIFICATIONS:

- Solid brass body and clear polyurethane gaskets
- Screws and gaskets included

#### CARES:

- Can be cleaned with water and a soft cloth
- Use of harsh or abrasive cleaners may harm finish and will void the warranty.
- Do not use power tools when installing or spray lubricant

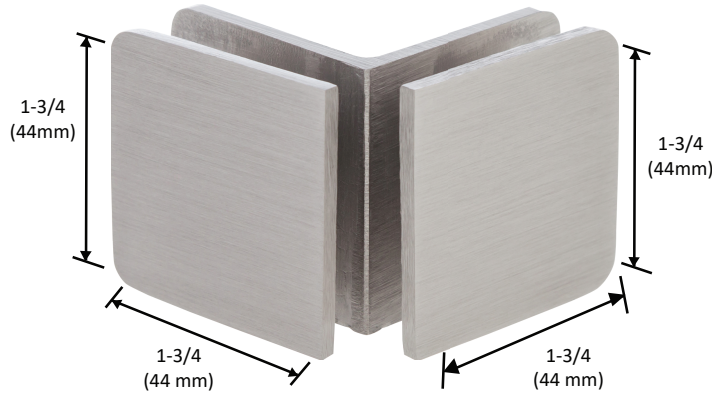


#### AVAILABLE FINISHES:




### Flat Edge Glass Cut-Out

3/4" (19mm)  
Diameter Hole

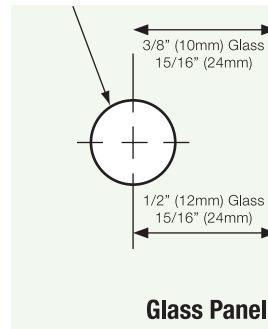

Butting Panel


3/4" (19mm)  
Diameter Hole

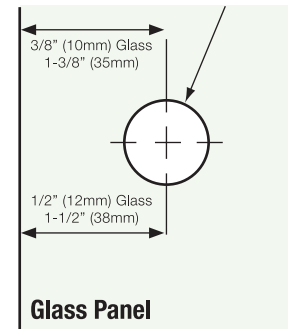

Overlapping Panel

### 45° Mitered Edge Glass Cut-Out


3/4" (19mm)  
Diameter Hole

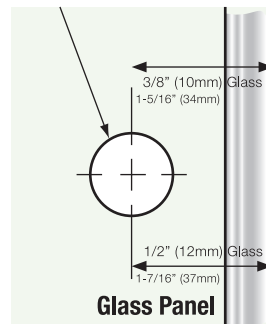

45° Mitered Panel

Outside Edge of Miter

3/4" (19mm)  
Diameter Hole

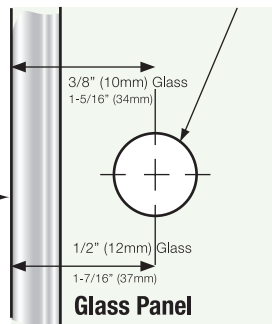

45° Mitered Panel

Rev May,2022